



Muro LED Solar Sign Light

Technical Specifications

Introducing our innovative Surface Mounted LED Solar Light for illuminating signs and wall fascia's. With advanced features and sustainable design, it's the perfect solution for efficient and impactful lighting.



15 Watt

Features

- Reliable solar power
- Brilliant illumination
- Easy installation
- Durable and weatherproof
- Energy efficient
- Low maintenance
- Versatile applications




25 Watt

Upgrade your signage with our Surface Mounted LED Solar Light. Experience reliable solar power, exceptional brightness, and easy installation. Illuminate your message sustainably. Contact us today for transformative lighting solutions.


Applications

- Signs
- Billboards
- Entry Statements
- External Stairways
- Feature Highlighting
- Open Balconies
- Terrace Ways
- Fascia's

15 Watt

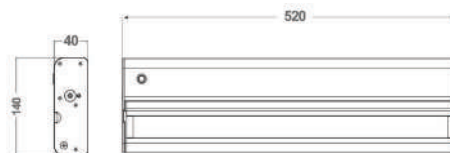

25 Watt

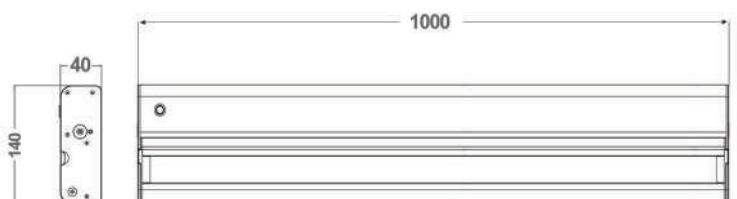

Muro LED Solar Sign Light

Technical Specifications



15 Watt Solar Sign Light



25 Watt Solar Sign Light

Specification

Details	Muro 15W - 520mm Batten	Muro 25W - 1000mm Batten
Reference		
Product Code	MURSSL-15W-520	MURSSL-25W-1000
Light		
LED Power	15W	25W
Efficiency	180 Lumens / Watts	180 Lumens / Watts
LED Lifetime	100,000Hrs to LM80	100,000Hrs to LM80
Light Output	1,875LM	3,125LM
Battery		
Type	Lithium Ion Phosphate LiFePO4	Lithium Ion Phosphate LiFePO4
Capacity	80WH	140WH
Charging time	6-7 Hours	6-7 Hours
Lifespan	Over 4000 Cycles (>10 Years)	Over 4000 Cycles (>10 Years)
Solar Panel		
Power	15 Watts	25 Watts
Cell type	Monocrystalline Panel	Monocrystalline Panel
Life Span	25 Years	25 Years
Charging Controller		
Life Span	>12 Years	>12 Years
Working Modes	Auto On/Off	Auto On/Off
Control Modes	Activated by the sun	Activated by the sun
Environmental		
Working Temperature	-15°C to 70°C	-15°C to 70°C
Water Resistance	IP65	IP65
Dimensions		
Product Size	520 x 140 x 40mm D	1000 x 140 x 40mm D
Package Size	540 x 160 x 60mm D	1020 x 160 x 60mm D